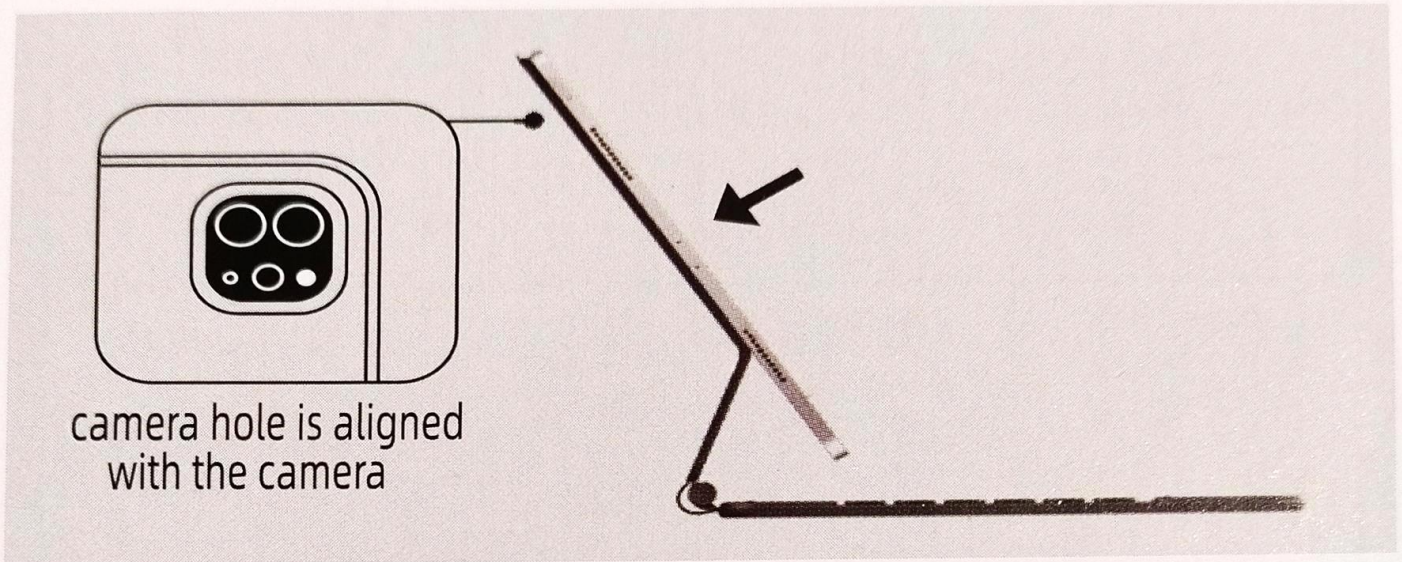





12.9 Wireless Magic Keyboard User Manual

Installation


1. Installation-Put iPad on the magnetic stand as shown below



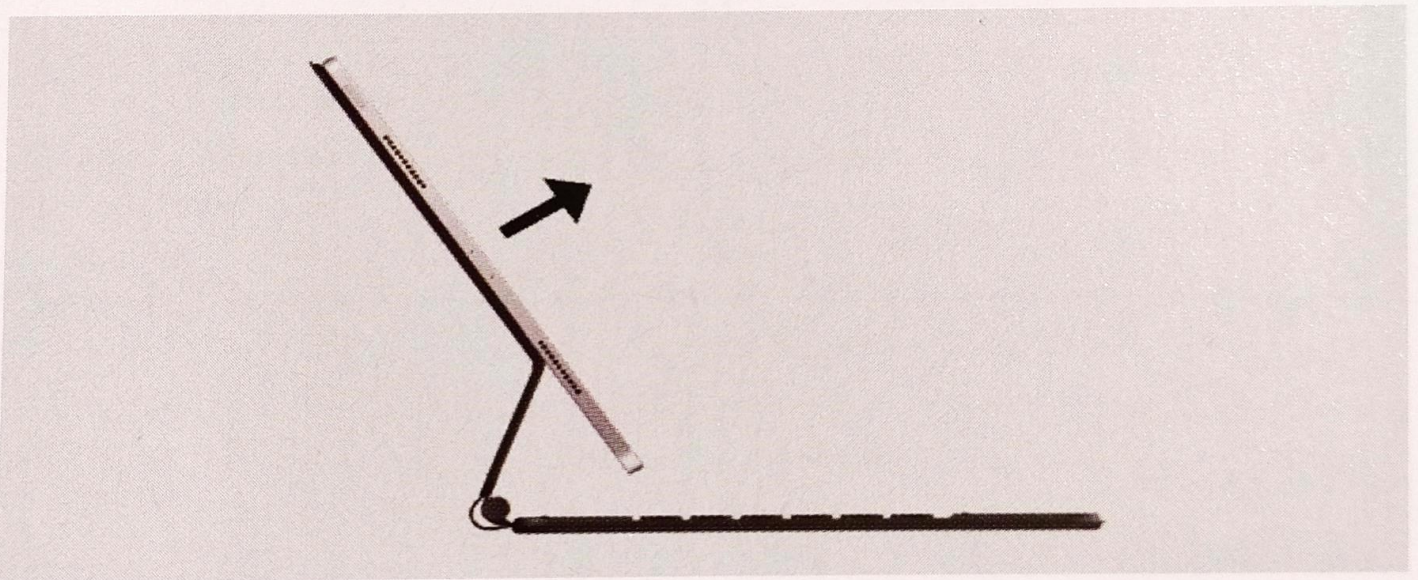2. Removal-Pull up to remove your iPad from the stand




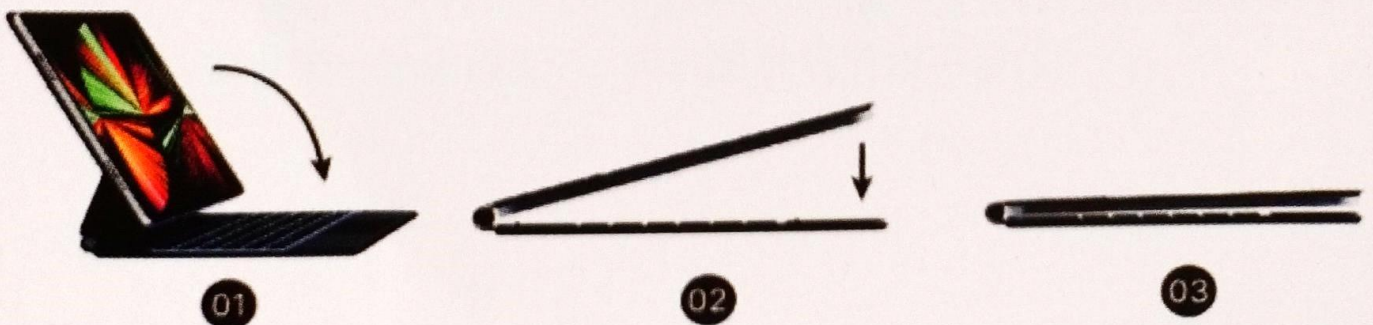3. Machine Assembly: You can put iPad in the case and fold the case for easy portability




Keyboard Instructions


** Please read the operating instructions carefully before use **

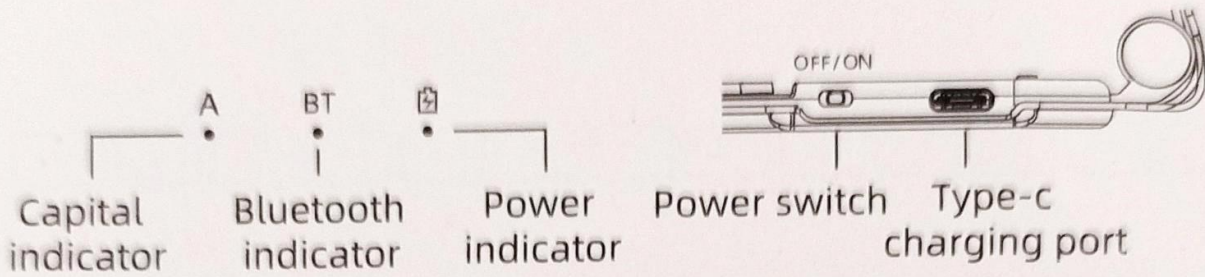


Connection

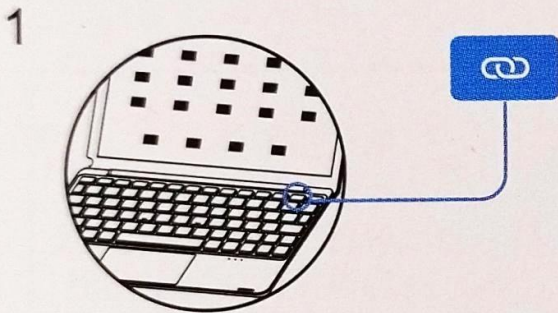
Connect with your iPad



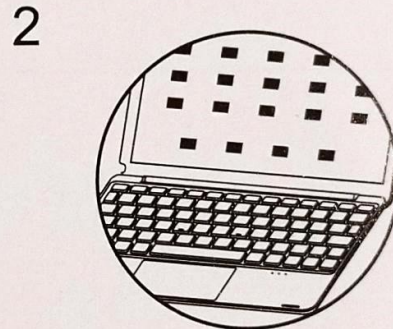
Turn on keyboard, power, long press  key for the three seconds, then keyboard pairing light flashes



Go to iPad Settings.




















Turn on Bluetooth on your iPad and keep "ON" .



Search menu-Other devices "Wireless Keyboard"
The wireless signal light is off after paired successfully.

Notice: The Bluetooth will automatically connect with your device when second time using.

Description of function keys


Button icon	Instruction	Button icon	Instruction
esc	Undo input		Reduce brightness
	Increase brightness		Open the recently used window
	Search		Open/Close siri
	Previous song		Play/Pause
	Next song		Mute
	Volume-		Volume+
	Lock screen		Long press to pair
	Switch languages		Fn+this key: Brightness adjustment
	Fn+this key: Backlight color changes		Compound key of Fn and control
ON/OFF	Power switch Pull up ON Pull down OFF		

Description of Bluetooth keyboard pairing status and indicators

1. Power on indicator:

Turn ON, BT blue light flickers. When the power is less than 20%, the red light flashes slowly to indicate low battery. Turn OFF, the keyboard stops working.

2. Bluetooth connection methods:

- a. Turn ON, BT Bluetooth indicator flashes to enter the pairing state.
- b. Re-pairing, long press  key for 3 seconds to enter pairing mode, blue light flashes 3 times per second to enter pairing mode, the fast broadcast time is 180 seconds, blue light is off when the pairing is successful; if the pairing is not successful, the backlight and other indicators all go off and the keyboard goes into sleep mode.

3. Reconnect Bluetooth indicator:

After the first pairing is successful, turn off the keyboard and turn on the keyboard, and then automatically enter the Bluetooth reconnection mode. The blue light flashes 3 times per second to enter the reconnection state. The blue indicator turns off after successful connection within 5 seconds. If the connection is not successful, the backlight and other indicators are all off, and the keyboard enters sleep mode.

4. Charging indicator:

When TYPEC charging, the red light is always on. The red light is off when fully charged. Low battery indicator: When the battery power is less than 20% (3.2v), the red light starts to flash slowly (1 time per second) until the keyboard is turned off.

5. CapsLK indicator:

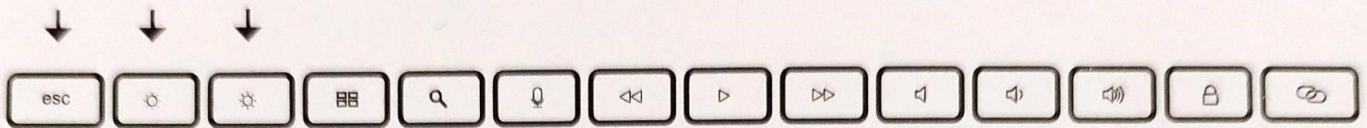
Uppercase/lowercase ON/OFF, the white indicator light is always ON/OFF, after connecting to iPad, open Settings - General - Physical keyboard - Turn off using the caps lock key to switch languages.

6. Keyboard enter sleep mode:









The keyboard stops pairing if the user does not operate the keyboard within 3 minutes or when the keyboard is abnormally connected, the backlight and other indicators are all off, and the keyboard enters sleep mode; after pairing and normal use, the keyboard does not operate for 30 seconds, the backlight is off, and the keyboard enters the standby state. If the keyboard is not used for 10 minutes, it enters sleep mode and can be woken up by pressing any key on the keyboard (the trackpad cannot be woken up). When the battery power is lower than 15% (3.1-3.15V), the backlight is turned off; when the battery power is greater than 20%, the backlight is turned on.







7. Reset settings:

Press **esc** + **⌘** + **⌘** for 3 seconds then indicator flashes 3 times to clear the keyboard pairing information and return to the second level of white backlight.



IPAD Trackpad Gestures Instructions

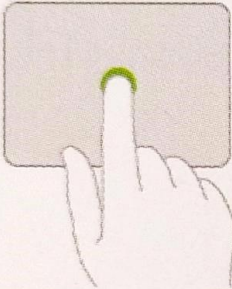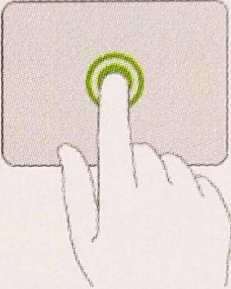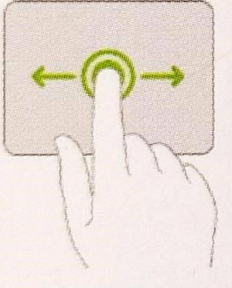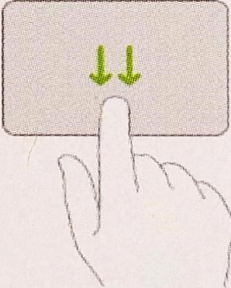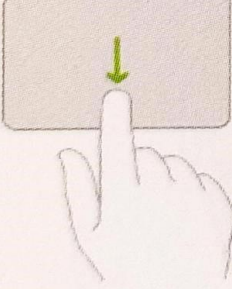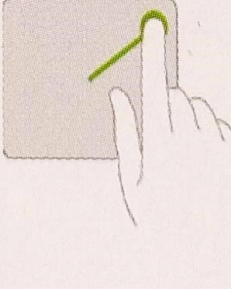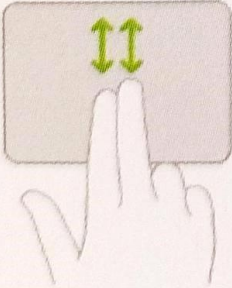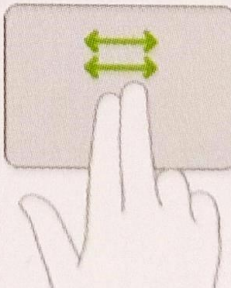 <p>Tap: Press with one finger until you feel a little click</p>	 <p>Tap and hold: Press and hold with one finger</p>
 <p>Drag: Tap and hold an item, then swipe your finger across the trackpad to move it</p>	 <p>Go to the Home Screen: Swipe the pointer across the bottom of the screen with one finger. Once the Dock appears, swipe the pointer across the bottom of the screen again. Or tap the bar at the bottom of the screen</p>
 <p>Open the Dock: Swipe the pointer across the bottom of the screen with one finger</p>	 <p>Open Control Center: Move the pointer with one finger to select the status icon in the upper right, then tap. Or select the status icon in the upper right, then swipe up with one finger</p>
 <p>Scroll up or down: Swipe up or down with two fingers</p>	 <p>Scroll left or right: Swipe left or right with two fingers</p>

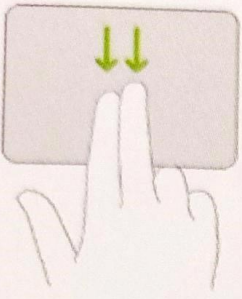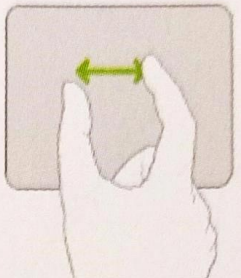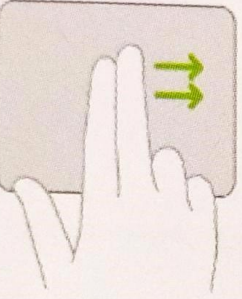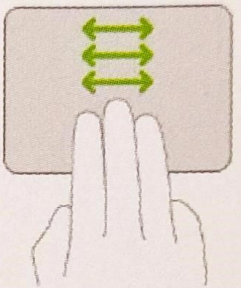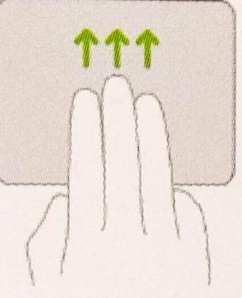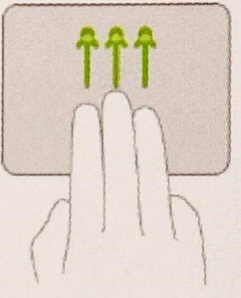 <p>Open Search from Swipe down with two fingers</p>	 <p>Zoom: Place two fingers close together. Pinch to zoom in, or pinch to zoom out</p>
 <p>Open the Today view: When the Home or Lock screen is visible swipe right with two fingers</p>	 <p>Switch between open apps: Swipe left or right with three fingers</p>
 <p>Go to the home screen: Swipe up with three fingers</p>	 <p>Open the App Switcher: Swipe up with three fingers, pause, then lift your finger. Or pinch with four fingers, pause and lift your fingers</p>

Notice:

- Operating system: IOS 15.0 and above (equipment must support touch)。
- Touch Settings (After pairing successfully) : Settings → General → Trackpad → Click / Double fingers assist point (on)。
- Sensitivity settings: Settings → General → Trackpad → Tracking Speed (adjust to a suitable speed)。
- Abnormal touch function:(1) Setting → auxiliary function → Touch → auxiliary touch open or close。
(2) When the tablet has no mouse icon, you can zoom in and out with double-fingers on the trackpad to restore it.

Product Parameters

Modulation System	GFSK
Working Voltage	3.3-4.2V
Working Current(turn off backlight)	2.5mA
Standby Current	0.5mA
Sleeping Current	<0.04mA
Charging current	300mA
Standby Time	≥ 1500 Hours
Charging Time	3.5 hours
Working Current for the Brightest Backlight	≈120mA
Continuous Working Time for the Brightest Backlight	>4Hours
Sleep Time of Backlight	30s
Deep SleepTime of Keyboard	10min
Battery Capacity	500mAh
Continuous Working Time	320 hours

Key Considerations

- 1.Please store and use the product at room temperature**
- 2.Do not disassemble, repair and modify the product by yourself**
- 3.Do not expose this product to rain or humidity**
- 4.Do not use chemical solvents to wipe this product**
- 5.Do not throw, to avoid product damage caused by falling**
- 6.If you do not use it for a long time, please charge the product every 2 months**
- 7.Do not discard at will, or place it in high temperature fire to avoid danger**

The contents of this user manual and the specifications of this product are subject to change without prior notice

⚠ Notice: Please read the user manual carefully for correct operation of this product

MADE IN CHINA